

HPL LEATHER SHEETS






HPL LEATHER SHEETS

the simplest way of bonding!

SIBU HPL leather sheets combine the well known HPL manufacturing technology with the high standards of SIBU DESIGN PU leather surfaces.

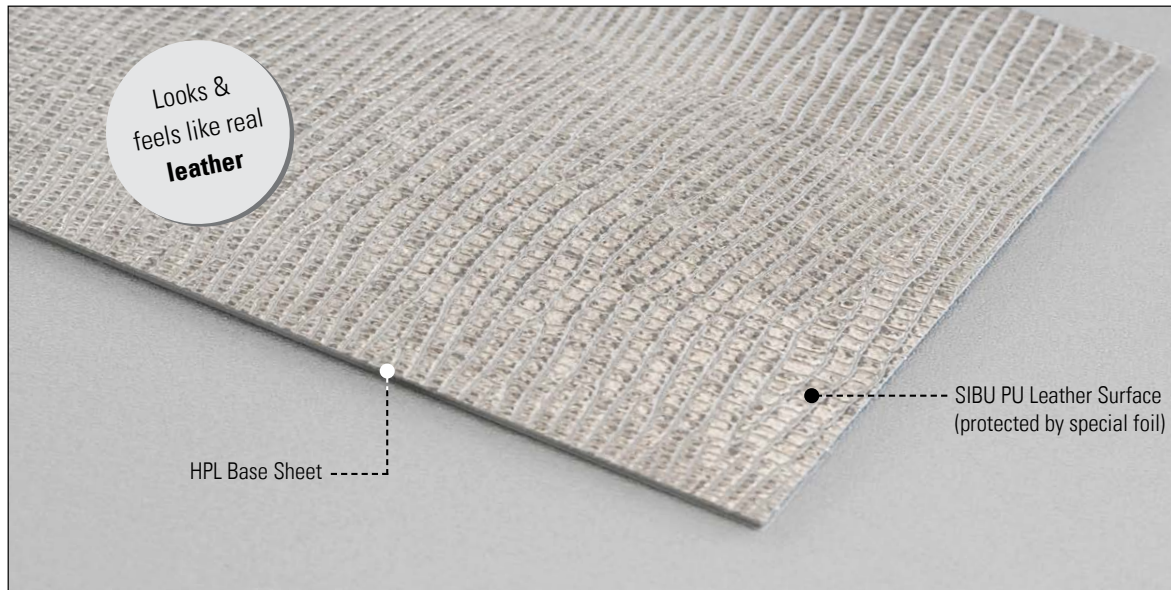

Composition on the example of HPL LL Leguan



Back of the HPL leather sheet

COMPO- SITION

Surface protection: transparent, light adhesive PE film

Top surface: PU leather with a thickness of 0.8 to 2.3mm

HPL base sheet: 1.0mm thickness

Total thickness: from 1.8 to 2.3 mm
(the thickness of the synthetic leather surface layer represents the difference)

HPL LEATHER SHEETS Delivery Programme

Our Sales team is pleased to inform about other versions.



SIBU
DESIGN



HPL LL Leguan Silver

2780x1280x1,8


NA 15893



HPL LL Leguan Copper

2780x1280x1,8

NA 15894

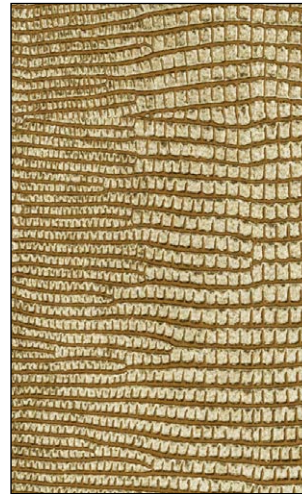

HPL LL Leguan Gold

2780x1280x1,8

NA 15892



HPL LL Leguan Nero

2780x1280x1,8

NA 15895



HPL LL Leguan Bianco

2780x1280x1,8

NA 15896


All variations
available in
format
2780x1280mm



HPL LL White

2780x1280x2,3

NA 15891

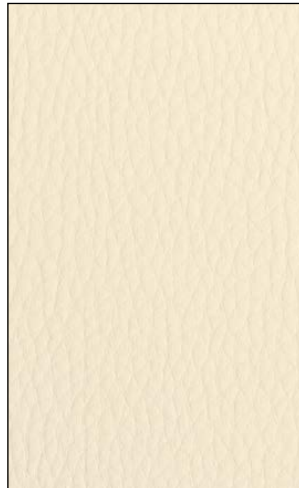

HPL LL Creme

2780x1280x2,3

NA 15886



HPL LL Dark Brown

2780x1280x2,3

NA 15889



HPL LL Black

2780x1280x2,3

NA 15885




HPL LL Mocca matt

2780x1280x2,1

NA 15900

NA non-adhesive

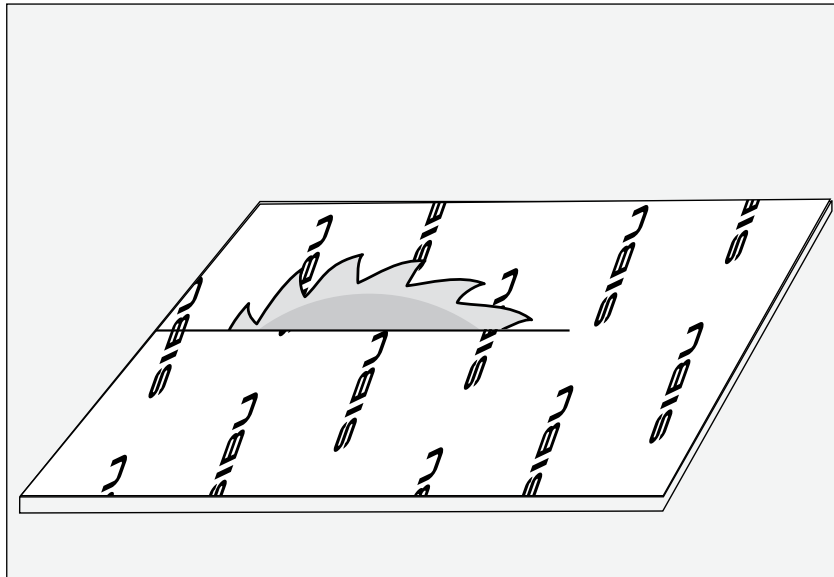

Sawing

SAW BLADE INFORMATION

The following represents information regarding suitable saw blades for the lint- and thread-free cutting of HPL LEATHER SHEETS.

Sheet split up saw


Diam: 255 mm (10 in.)
Blade thickness: 2.8 mm
Number of teeth: 80
Execution: FZ/WZ
RPM: 6,000-6,700

Format circular saw

Diam: 300 mm (11.8 in.)
Blade thickness: 3.2 mm
Number of teeth: 90
Execution: FZ/WZ
RPM: 5,000-5,800

PLEASE NOTE. Optimum cutting quality is obtained by using an overlay on the top surface.

Temperature resistance:	The temperature characteristics of SIBU products do not alter in conjunction with the HPL plate.
Inflammability:	fire rating class B2 (DIN 4102)
Suitability for wet rooms:	to a limited extent
Cleaning:	cleaning only with soapy water and rag
Storage:	flat on pallet, dry, protected against light and dust
Processing:	in order to ensure lint- and thread-free cutting, please note our cutting blade information.
Thickness:	1.8-2.3 mm (see delivery program)
Weight:	6-7 kg/panel
Package:	flat packed

 This information tool was prepared to the best of our knowledge and with special care. The data provided is based on practical experience, test results and company experiments and corresponds with our current know-how level. No responsibility is accepted for misprints, standard-related mistakes and errors.

